


Dräger Regard® 7000F Industrial Fire and Gas Controller

The Regard 7000F is an ANSI/UL864* performance-approved combination fire and gas system with the functions of a traditional NFPA 72 fire panel and a process safety system in a single platform. Multi-tasking and flexible, the menu-driven REGARD 7000F is an easily configurable solution that can be customized for all industrial fire and gas applications.

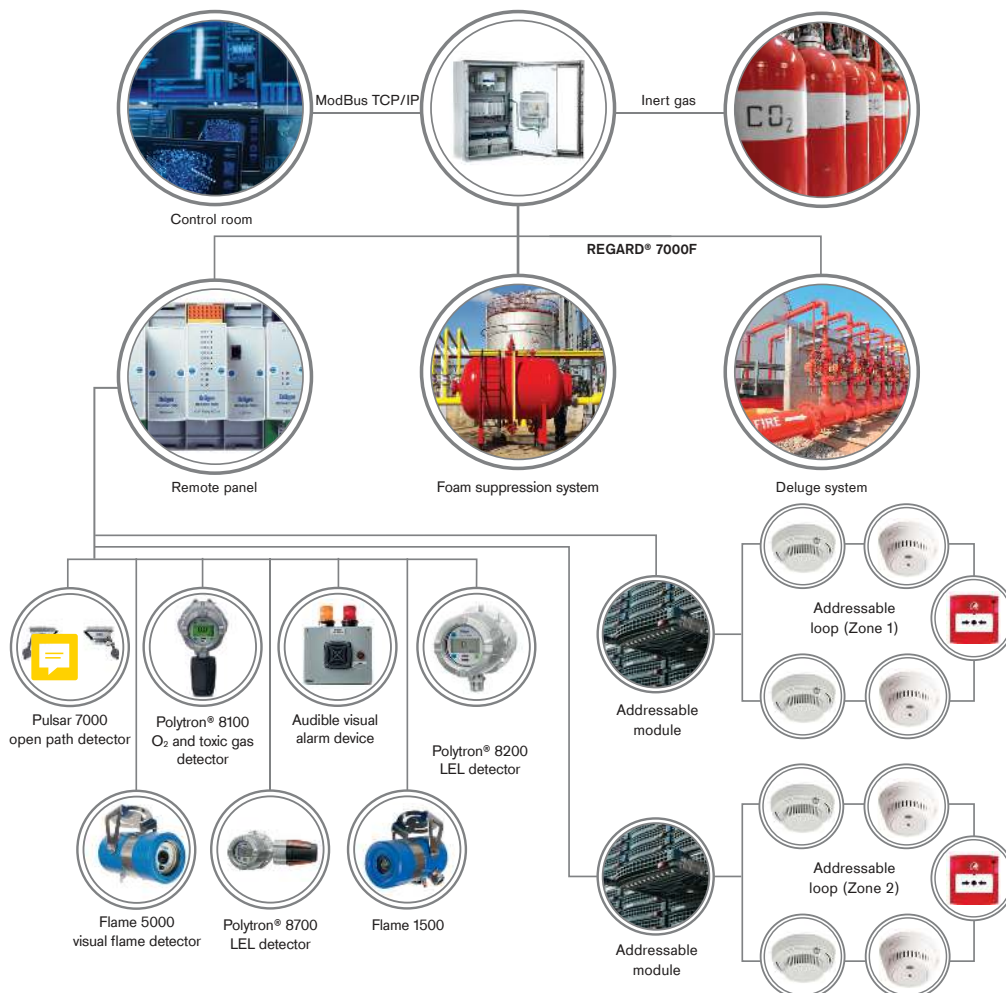

D-36254-2/021

Benefits

A Single Platform Combination System

The Draeger Regard 7000F is approved as a “Combination system” on a single platform by UL to the American National Standard, ANSI/UL 864-2020. This performance approval enables the functionality of Process Safety and Fire Signaling on a single platform. The approval includes UL 864 10th edition, including revisions through May 7, 2020 and most recent 2019 version of the National Fire Alarm and Signaling Code, NFPA 72.

The system is based on our flagship REGARD 7000 modular controller for process safety applications, resulting in a single platform fire & gas system with both ICSS/SIS functionality and protected premises (PP) fire signaling functionality.

The system can process digital and analog signals from gas detectors, flame detectors, addressable heat and smoke detectors and manual call points – while supporting remote access via HART® and Modbus digital loops for compatible Dräger detectors and maintaining compliance with applicable NFPA codes and UL 864 performance criteria. Its flexible interface and communication options enable efficient visualization, notification and seamless interoperability for critical process safety and fire protection systems.

The Regard 7000F can handle complex cause and effect scenarios to suit site-specific requirements, and its supervised circuits can be configured to trigger suppression and mitigation systems and/or activate or shut down various process control equipment such as HVAC fans and louver systems. The modular architecture makes it possible to configure multiple remote I/O panels to cover individual process units for diverse requirements throughout the entire facility.

Process Safety

The performance approved Dräger REGARD 7000F Series controllers can handle process safety and fire signaling functionality on a single platform in an open architecture so you can configure the system with any NRTL performance-approved devices and accessories that meet their applicable regulatory codes. The REGARD 7000F uses its native 'masterless' system architecture to prevent the entire system from failing if a single module fails (no single point of failure). This concept of individual smart modules also makes it easy to configure each module as an independent subsystem for AIDCs (Analog Initiating Device Circuits) or DIDCs (Digital Initiating Device Circuits) using various 3-wire analog, discrete (contact closure) or digital devices (i.e. Modbus RTU) and conventional or addressable loop modules based on the requirements of the process area application. The individual docking stations and DIN rails can then be configured for protected premises fire protection applications only, flame and gas with annunciation, process safety applications (including gas detectors, variable power relay output modules, pressure and temperature transmitters, or any combination of these devices) into one REGARD 7000F system.

With a capacity for over 600 devices and a flexibility to use multiple main and remote panels, the system is designed to cover the majority of mid- to large-sized process facilities.

Benefits

Fire Signaling

The Dräger REGARD 7000F is a complete fire and gas detection solution designed and supported by the Dräger engineering team at our Houston System Center to provide 100% compliance with our ANSI/UL 864 approval and the 2019 version of the National Fire Alarm Code, NFPA 72.

This Protected Premises (PP) system has passed the industry-preferred, most rigorous performance approval standard for fire signaling and accessories control systems, ANSI/UL 864-2020. This approval includes by reference many of the National Fire Protection Association's most recent codes and standards, such as:

- Carbon Dioxide Extinguishing Systems, NFPA 12;
- Halon 1301 Fire Extinguishing Systems, NFPA 12A;
- Installation of Sprinkler Systems, NFPA 13;
- Water Spray Fixed Systems for Fire Protection, NFPA 15;
- Installation of Foam-Water Sprinkler and Foam-Water Spray Systems, NFPA 16;
- Dry Chemical Extinguishing Systems, NFPA 17;
- Wet Chemical Extinguishing Systems, NFPA 17A;
- National Electrical Code, NFPA 70;
- National Fire Alarm Code, NFPA 72;
- Standard for Smoke Control Systems, NFPA 92;
- Standard for Water Mist Fire Protection Systems, NFPA 750;
- Clean Agent Fire Extinguishing Systems, NFPA 2001; and
- Standard for Fixed Aerosol Fire Extinguishing Systems, NFPA 2010.

Dräger's expertise and support extends beyond the hardware and software components of the REGARD 7000F. A complete NFPA 72v2019 system solution requires much more than just the controller and devices. Today, the Dräger engineers who design each fire and gas system can provide documentation to support the system's performance design. Dräger's system documentation would include, where required, the prescriptive designs historically utilized for the traditional fire gas detectors and devices (e.g., smoke, heat, CO₂ detectors and annunciation), as well as additional recommendations per our team's combined experience and expertise in the design of fire and gas systems. These code-compliant, inspection-ready packages can bring peace of mind and confidence in a project review by the authority having jurisdiction, whenever such an audit or approval may be required.

Local Expertise

The economical solution for process safety and fire signaling on a single platform, Regard 7000F is designed and manufactured in our UL508A Houston System Center. Post installation, the system and devices can be serviced by Draeger Certified NICET field service engineers. All spare parts and replacement components of the system are available directly from your local Dräger representative, with a quick delivery from our dedicated warehouse in Memphis, TN.

Benefits

Training

Introductory end-user training is available at your facility. Our experienced trainers offer formal training courses at the Dräger Academy at the Dräger System Center in Houston, Texas.

Technical Data

| | |
|--|---|
| Environmental conditions | |
| Temperature | 0 to 55 °C / 32 to 131 °F (during operation) |
| Humidity | -40 to +65 °C / -40 to 149 °F (in storage) 5 to 95% RH, non-condensing |
| Pressure | 700 to 1,300 hPa |
| Height | Max. 2,000 m (6,561 ft) above sea level (only applies to Relay Module 240 V AC) |
| Notification time of response | |
| Transmission of measurement values and status information in Dräger REGARD® 7000F < 10 seconds | |
| Time to measurement readiness | |
| After switching on the Dräger REGARD® 7000F | < 30 s |
| Dräger REGARD® 7000 Docking Station 8-slot | |
| Terminal clamps | Plug-in contacts for wire cross sections of 0.08 to 2.5 mm ² |
| Operating voltage | 24 V (18 to 30 V) DC |
| Current draw | Max. 22 A (independent of the number of installed modules and connected transmitters) |
| Power loss | Max. 15 W at 24 V |
| SFR output | Min. 3.3 V, 10 mA, max. 30 V, 2 A switching capacity; the SFR output must be protected against overload |
| SSR output | Min. 3.3 V, 10 mA, max. 30 V, 2 A switching capacity; the SSR output must be protected against overload |
| Number of modules per docking station | Max. 8 |
| Dimensions | 184 x 400 x 78 mm / 7.24 x 15.75 x 3.07" (H x W x D) Weight 2,600 g / 5.73 lbs |
| Dräger REGARD® 7000 4-20 mA Input Module c/w HART® | |
| Number of input channels | Max. 8 |
| Operating voltage | 24 V (18 to 30 V) through docking station |
| Transmitter supply voltage | Typically 24 V, depending on the supply voltage of the docking station |
| Transmitter supply current | Max. 500 mA per channel, with max. 4 inputs occupied Max. 250 mA per channel, with 4 to 8 inputs occupied Total transmitter supply current max. 2 A |
| Voltage range for signal input | 0 to 24 mA (short-circuit detection at 38 mA) |
| Measurement precision | ± 0.05 mA ± 0.002 mA/K (0 to 4 mA) ± 1.25% ± 0.05%K (4 to 24 mA) |
| Current draw | Max. 2.1 A |
| Power loss | Max. 5 W at 24 V |
| Terminal block | 24-pin, DC |
| Dimensions | 110 x 46 x 130 mm / 4.33 x 1.81 x 5.12" (H x W x D) |
| Weight | 265 g / 0.58 lbs |
| Dräger REGARD® 7000 Digital Input Module | |
| Number of input channels | Max. 8 |
| Operating voltage | 24 V (18 to 30 V) through docking station, |
| Channel output voltage | Typically 24 V, depending on the supply voltage of the docking station |

Technical Data

| | |
|---|--|
| Supply current of the connected input elements | Max. 400 mA per channel, with max. 4 inputs occupied Max. 250 mA per channel, with 4 to 8 inputs occupied Total supply current max. 2 A |
| Standby current through EOL resistance | Configurable to 0 mA (line break detection switched off) and in the range of 5 to 400 mA |
| Switching threshold | Configurable in the range of 3 to 400 mA |
| Current draw | Max. 2.1 A |
| Power loss | Max. 5 W at 24 V |
| Terminal block | 16-pin, DC |
| Dimensions | 110 x 46 x 130 mm / 4.33 x 1.81 x 5.12" (H x W x D) |
| Weight | 265 g / 0.58 lbs |
| Dräger REGARD® 7000 Gateway Module | |
| Number of channels | 1 channel, bidirectional; One gateway module always occupies one port in the overall system |
| Modbus RTU gateway and gateway module supply voltage | 24 V (18 to 30 V) DC |
| Gateway module current draw | Typ. 160 mA at 24 V |
| Gateway module power loss | Max. 4 W at 24 V |
| Modbus RTU gateway current draw | Typ. 80 mA at 24 V |
| Modbus RTU gateway power loss | Max. 2.5 W at 24 V |
| Transmission rate | Adjustable 9,600 to 921,600 baud |
| Cable length between Dräger REGARD® 7000 Gateway OIP and Dräger REGARD® 7000 Modbus RTU Gateway | Max. 5 m |
| Cable type | STP (shielded twisted pair), e.g. LAPP Unitronic® Bus LD Cable |
| length RS-485 side | <57,600 baud max. 1,200 m / 3937 ft <230,400 baud max. 500 m / 4921 ft <921,600 baud max. 120 m / 423 ft |
| Terminal block | 2-pin |
| Dimensions | 110 x 46 x 130 mm / 4.33 x 1.81 x 5.12" (H x W x D) |
| Weight | 265 g / 0.58 lbs |
| Galvanic isolation between Dräger REGARD® 7000 and field-bus side through Modbus RTU Gateway | |
| Dräger REGARD® 7000 Modbus RTU Gateway | |
| Dimensions | 116 x 23 x 115 mm / 4.57 x 0.91 x 4.53" (H x W x D) |
| Weight | 130 g / 0.29 lbs |
| Dräger REGARD® 7000 Relay Module 24 V DC/24 V DC complex | |
| Number of output relays | 8, each with one switch contact |
| Switching voltage | 3.3 to 24 V DC |
| Switching current | 10 mA to 2 A |
| Power consumption | Max. 100 mA (no relays activated) Max. 200 mA (8 relays activated) |
| Power loss | 5 W at 24 V |
| Update rate of switch outputs | 0.5 s |
| Terminal block | 24-pin, 24 V |
| Dimensions | 110 x 46 x 130 mm / 4.33 x 1.81 x 5.12" (H x W x D) |
| Weight | 340 g / 0.75 lbs |
| Dräger REGARD® 7000 Slotcover | |
| Dimensions | 69 x 44 x 44 mm / 2.72 x 1.73 x 1.73" (H x W x D) |
| Weight | 53 g / 0.12 lbs |

Technical Data

Dräger REGARD® 7000 Terminal Block

| | |
|---|---|
| Dimensions | 110 x 46 x 85 mm / 4.33 x 1.81 x 3.35" (H x W x D) |
| Weight | 115 g / 0.25 lbs |
| Approvals | |
| UL864 | NFPA 72 Compliant UL864* (*Pending) ATEX Directive (2014/34/EU) Electromagnetic Compatibility (2014/30/EU) Low Voltage Directive (2014/35/EU) |
| HART® is a registered trademark of the HART® Communication Foundation | |

Ordering Information

Please contact your local Draeger Representative for more information.

* UL864 approval pending

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

USA

Draeger, Inc.
7256 S. Sam Houston Parkway W.,
Suite 100
Houston, TX 77085
1 800 4DRAGER
(1 800 437 2437)

Locate your Regional
Sales Representative at:
www.draeger.com/contact

