

Refrigerated Compressed Air Dryers

HPR & HPRN VALUE SERIES



Reliable Operation...

Customers around the world have relied on Hankison for great value in air treatment solutions. Hankison Value Line Refrigerated Dryers offer a simple solution based on a long history of industry leading technology.



Efficient Smooth Copper Heat Exchangers

HPR5/10 – HPR50 5/10 – 50 scfm

BETTER BY DESIGN

- Smooth bore, copper tube-on-tube heat exchangers deliver low pressure dew point performance
- Centrifugal separator efficiently captures liquid condensate at varying inlet loads
- Static condenser design – provides trouble free , quiet operation

RELIABLE CONDENSATE MANAGEMENT

- Models 10-15 scfm: Pneumatically operated internal float drain
- Models 25-50 scfm: Electronic drain valve

EASE OF MONITORING

- Models 10-15 scfm: Lighted On/Off switch
- Models 25-50 scfm: Lighted On/Off switch and dew point temperature indicator

OPTIONS

- Air bypass valve allows ease of service
- Wall mount bracket enables flexible installation

SAFETY FIRST – ENVIRONMENTAL FRIENDLY

- CFC free R134a refrigerant
- CSA approved



Air Bypass Valve

HPR75 – HPR500

75 – 500 scfm

TIME PROVEN DESIGN

- 316 stainless steel, brazed plate heat exchangers efficiently dry the air to the specified pressure dew point.
- Hot gas by-pass valve maintains constant evaporator temperature
- Replaceable ambient air filter protects the condenser from airborne contaminants
 - » *Maintenance kits include ambient air filter*

CONDENSATE MANAGEMENT

- Integral stainless demister/separator captures liquid condensate and solid particles
- Electronic drain valve automatically discharges condensate from the dryer


STAY IN CONTROL

- Model 75-150 scfm: Lighted On/Off switch and dew point indicator
- Models 200-500 scfm: Lighted On/Off switch, LED dew point temperature indicator, timer drain adjustment on the panel

SAFETY FIRST – ENVIRONMENTAL FRIENDLY

- CFC free R134a refrigerant
- CSA approved

Value at its finest...

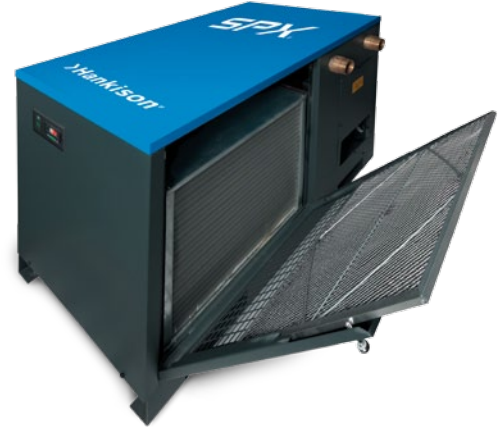


Adjustable Timed Electric Drain



Controls: Models 200-500 scfm

Performance at its best...

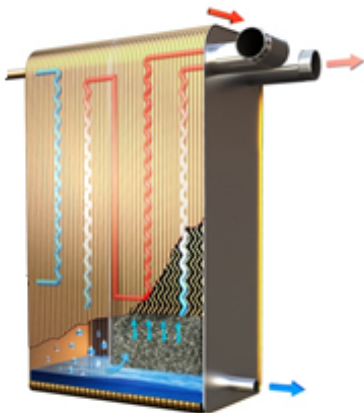

Stainless Steel Demister/Separator



Controls: Models 200-500 scfm

HPRN75 – HPRN500 75 – 500 scfm

GLOBALLY PROVEN PERFORMANCE

- Stainless steel, cross flow heat exchangers optimize heat transfer and service life
 - » *ISO 8573-1 Air Quality: Class 4 pressure dew point*
 - » *Smooth, non-fouling channels promote low pressure drop*
- Herringbone geometry stamped into the stainless steel plates creates turbulent flow, for a self-cleaning effect
 - » *No pre-filter required for full 2 year warranty*
 - » *5 year heat exchanger warranty*
- Stainless steel inlet and outlet connections promote corrosion free service
- Compact design saves floor space

EFFICIENT CONDENSATE MANAGEMENT

- Increased calming zone and integral demister/separator captures liquid condensate and solid particles
 - » *Effectively removes condensate from 0 to 100% flow conditions without moisture carry-over*
- Furnished with a timed electric condensate drain
 - » *Includes a Y-strainer to protect the valve from rust and scale*

EASY TO MONITOR

- Models 75-150: Illuminated On/Off Switch; dew point temperature display indicator to monitor inlet load conditions
- Models 200-500 scfm: Illuminated On/Off Switch; LED dew point temperature display; dry alarm contact
 - » *Equipped with panel mounted drain timer control*

SAFETY FIRST – ENVIRONMENTAL FRIENDLY

- Models 75-125 scfm CFC free R134a
- Models 150-500 scfm R407c refrigerant
- CSA approved

International Air Quality Class Standards

ISO 8573-1 AIR QUALITY STANDARD

ISO 8573-1, the international standard for compressed air quality, defines the amount of contamination permissible in compressed air.

The ISO standard identifies three primary forms of contamination in compressed air systems – solid particles, water and oil. Contaminants are classified and assigned a quality class, ranging from Class 0, the highest purity level, to Class 6, the most relaxed.

HPR and HPRN series refrigerated air dryers offer the perfect balance between technology and simplicity to dry compressed air systems to ISO 8573-1 Air Quality Class 4 to 5 – pressure dew points.



OPTION PRE-FILTRATION

NGF series – PF grade filtration – removes solid and oil contaminants from the air stream before entering the dryer.

ISO Air Quality Class:

- Solids – Class 2
- Remaining Oil – Class 4
- Removes solids 1.0 micron and larger
- Remaining oil content 2.0. mg/m³

OPTION AFTER-FILTRATION

NGF series – HF grade filtration – provides high efficiency oil removal protecting downstream equipment .

ISO Air Quality Class:

- Solids – Class 1
- Remaining Oil – Class 1
- Removes 99.999+% of solids \geq 0.01 micron
- Remaining oil content < 0.01 mg/m³

Product Specifications

MODEL	RATED FLOW SCFM	RATED FLOW M ³ /H	REFRIGERANT	VOLTAGE	POWER KW	INLET/OUTLET CONNECTIONS	DIMENSIONS (INCHES)			WEIGHT LBS
							H	W	D	
HPR5-10	5	17	R 134a	115/1/60	0.2	3/8" OD	15	13	13	64
HPR15	15	25	R 134a	115/1/60	0.24	3/8" OD	15	13	13	69
HPR25	25	42	R 134a	115/1/60	0.41	3/4" NPT	22	16	15	88
HPR35	35	59	R 134a	115/1/60	0.46	3/4" NPT	22	16	15	92
HPR50	50	85	R 134a	115/1/60	0.57	3/4" NPT	22	20	20	101
HPRN75	75	127	R 134a	115/1/60	0.52	1" NPT	24	14	32	123
HPR75	75	127	R 134a	115/1/60	0.72	3/4" NPT	20	19	20	110
HPRN100	100	170	R 134a	115/1/60	0.65	1" NPT	24	14	32	129
HPR100	100	170	R 134a	115/1/60	0.74	1" NPT	21	13	30	123
HPRN125	125	212	R 134a	115/1/60	0.68	1" NPT	24	14	32	135
HPR125	125	212	R 134a	115/1/60	0.76	1" NPT	21	13	30	161
HPR150-1	150	255	R 134a	115/1/60	1.11	1" NPT	21	13	30	161
HPRN150-2	150	255	R 407c	230/1/60	0.91	1" NPT	24	14	35	152
HPRN200-2	200	340	R 407c	230/1/60	1.53	2" NPT	30	18	37	196
HPR200-4	200	340	R 134a	460/3/60	1.42	1 1/2" NPT	30	17	36	183
HPRN250-2	250	425	R 407c	230/1/60	1.87	2" NPT	30	18	37	181
HPR250-4	250	425	R 134a	460/3/60	1.98	1 1/2" NPT	30	17	36	211
HPRN300-2	300	510	R 407c	230/1/60	2.09	2" NPT	32	19	44	252
HPR300-4	300	510	R 134a	460/3/60	2.05	1 1/2" NPT	30	20	38	219
HPRN400-2	400	680	R 407c	230/1/60	2.83	2" NPT	32	19	48	270
HPR400-4	400	680	R 134a	460/3/60	2.5	2" NPT	30	21	38	232
HPRN500-4	500	850	R 407c	460/3/60	3.18	2" NPT	32	21	48	328

¹ Rated Flow Capacity – Conditions for rating dryers are in accordance with ISO 7183 (Option A2). Compressed air at dryer inlet: 100 psig (6.7 barg) and 100°F (38°C); ambient air temperature: 100°F (38°C); operating on 60 Hz power supply.

² 1 = 115V (HPR150-1); 2 = 230V (HPRN150-2); 4 = 460V (HPR200-4)

At rated conditions, pressure drop is less than 5 psig.

Operating Conditions

FLOW MODEL	MAX INLET AIR PRESSURE		MIN INLET AIR PRESSURE		MAX INLET AIR TEMPERATURE		MIN INLET AIR TEMPERATURE		MAX AMBIENT AIR TEMPERATURE		MIN AMBIENT AIR TEMPERATURE	
	PSIG	BARG	PSIG	BARG	°F	°C	°F	°C	°F	°C	°F	°C
5-10 to 50	250	17	30	2	120	49	40	4	110	43	45	7
75 to 500	232	16	10	1	120	49	40	4	110	43	45	7

Capacity Correction Factors

To adjust the dryer capacity for non-standard conditions, use the Capacity Correction Factors (multipliers) from Tables 1 & 2.

-sizing Example:

What is the capacity of an HPRN100 at 100F inlet air temperature, 150 psig working pressure, and 110F ambient air temperature?

ANSWER:

100 scfm (rated flow from product specification table) x 1.08 (correction factor for inlet air temperature, table 1) x 0.94 (correction factor for ambient air temperature, table 2) = 102 scfm

Table 1 - Capacity Correction Factors

INLET AIR PRESSURE		INLET AIR TEMPERATURE			
PSIG	BARG	90°F/32°C	100°F/38°C	110°F/43°C	120°F/49°C
80	5.6	1.19	0.95	0.77	0.63
100	6.9	1.25	1	0.82	0.68
125	8.6	1.3	1.05	0.86	0.72
150	10.3	1.34	1.08	0.9	0.75
175	12.1	1.37	1.11	0.92	0.78
200	13.8	1.39	1.14	0.95	0.8
250	17.2	1.43	1.17	0.98	0.83

Table 2 - Ambient Air Temperature

AMBIENT AIR TEMPERATURE	80°F/ 27°C	90°F/ 32°C	100°F/ 38°C	110°F/ 43°C
Multiplier	1.12	1.06	1	0.94

HPR & HPRN VALUE SERIES

10 to 500 SCFM (17 to 850 M³/H)



Global locations

SPX USA

HANKISON HEADQUARTERS

4647 SW 40th Avenue
Ocala, Florida 34474-5788 U.S.A.
P: (724) 745-1555
F: (724) 745-6040
E: hankison.sales@spx.com

HANKISON RENTAL

NORTHEAST

100 Commerce Drive, Suite 40
Washington, PA 15301
P: (724) 225-1470
F: (724) 222-1317
E: rentaldryers@dehydration.spx.com

HANKISON RENTAL

SOUTHWEST

1486 Champion Drive
Terrell, TX 75160 U.S.A.
P: (800) 379-3711
F: (972) 563-9991
E: rentaldryers@dehydration.spx.com

SPX CANADA

HANKISON CANADA

1415 California Avenue
Brockville, ON, Canada k6v 7h7
T: (800) 267-3884
F: (800) 318-0952
E: hankison.sales@spx.com

SPX SOUTH AMERICA

HANKISON BRAZIL

Rua Joao Daprat, 231 b
09600-010-SÃO Bernardo
Do Campo, SP
Brazil
T: +55 (11) 2166-4050
F: +55 (11) 2166-4070

SPX EUROPE

HANKISON IRELAND

Killarney, Co Kerry
Ireland
T: (+353) 6466-33322
F: (+353) 6466-33371

HANKISON

NETHERLANDS

Munnikenheiweg 41
Postbus 570
4870 NE Etten-Leur
Netherlands
T: (+31) 76-5085800
F: (+31) 76-5085800

HANKISON GERMANY

Konrad-Zuse-Str. 25
D-47445 Moers Germany
T: (+49) 2841-8190
F: (+49) 2841-87112
E: csc@dehydration.spx.com

SPX INDIA

SPX India PVT, LTD
Manufacturing G-72/73
Riico Industrial Area
Mansarovar, RAJASTHAN
Jaipur 302 020
India
T: (+91) 141-2396759
F: (+91) 141-2395048

SPX ASIA PACIFIC

SPX CHINA

5th Floor, Park Center,
No.1568 Huashan Road,
Shanghai China
T: +86 (021) 2208-5840
F: +86 (021) 2208-5866

SPX KOREA

#940-1 Yerim-Ri
Jeonggwan-Myeon
Gijang-Gun
Busan
Rep. of Korea
T: +82 (51) 728-5360
F: +82 (51) 728-5359

Based in Charlotte, North Carolina, SPX Corporation (NYSE: SPW) is a global Fortune 500 multi-industry manufacturing leader.

For more information, please visit www.spx.com

SPX FLOW TECHNOLOGY

4647 SW 40th Avenue
Ocala, Florida 34474-5788 U.S.A.
P: (724) 745-1555
F: (724) 745-6040
E: hankison.sales@spx.com
www.spx.com/hankison

SPX reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spx.com.

The green ">" is a trademark of SPX Corporation, Inc.